

11-29-00

A

NEW APPLICATION TRANSMITTAL

ASSISTANT COMMISSIONER FOR PATENTS
Box Patent Application
Washington, D.C. 20231

PATENT
Attorney Docket No.: 108.1

JC658 U.S. PAT.
09/724306

11/28/00

Dear Sir or Madam:

Transmitted herewith for filing under 37 CFR §1.53(b) is a non-provisional patent application of:

Applicant(s): HUA ZHENG

For: DATA INPUT AND OUTPUT CIRCUITS FOR MULTI-DATA RATE
OPERATION

Enclosed are:

Patent Application - 21 pages of Specification, 9 pages of Claims, 1 page of Abstract,
and 15 sheets of formal drawings.

An unsigned Declaration & Power of Attorney


APPLICANT REQUESTS DEFERRAL OF THE FILING FEE UNTIL
THE RESPONSE TO THE NOTICE OF MISSING PARTS

PLEASE DO NOT CHARGE THE DEPOSIT ACCOUNT FOR THE FILING FEE

Please charge Deposit Account No 50-1229 as follows:

Any additional fees associated with this paper or during the pendency of this application.

Respectfully submitted,



Truong T. Dinh
Reg. No. 40,993

DINH & ASSOCIATES
2506 Ash Street
Palo Alto, California 94306
Tel: (650) 289-0600
Fax: (650) 289-0700

Express Mailing Label No.: EJ135053704US

Date of Deposit: 11/28/00

I hereby certify that this correspondence is being deposited with the
United States Postal Service "Express Mail Post Office to Addressee"
service under 37 CFR § 1.10 on the date indicated above and addressed to:
Assistant Commissioner for Patents, Washington, D.C. 20231

By: 
Truong Dinh

PATENT APPLICATION

**DATA INPUT AND OUTPUT CIRCUITS FOR
MULTI-DATA RATE OPERATION**

Inventor: Hua Zheng
256 Scotia Court
Fremont, California 94539
a citizen of United States

Assignee: **Winbond Electronics Corporation**
No. 4, Creation Road, III
Science-based Industrial Park
Hsin Chu, Taiwan, Republic of China
a corporation of Taiwan, R.O.C.

Entity: Large

DINH & ASSOCIATES
2506 Ash Street
Palo Alto, CA 94306
Tel (650) 289-0600
Fax (650) 289-0700

DATA INPUT AND OUTPUT CIRCUITS FOR MULTI-DATA RATE OPERATION

BACKGROUND OF THE INVENTION

5 The present invention relates generally to memory devices, and more particularly to data input and output circuits capable of supporting multi (e.g., double) data rate operation and a number of timing schemes.

Memory devices are integral to computer systems, and to many electronic circuits. Continuous improvements in the operating speed and computing power of
10 central processing units (CPUs) enable operation of an ever-greater variety of applications, many of which require larger and faster memories. Larger memories are characterized by having more memory cells to store more bits of data. Faster memories can be provided by reducing the time necessary for each read and write cycle and by allowing for access of multiple data bits on each clock cycle.

15 Memory devices can be designed to support a number of operating modes such as a single data rate (SDR) and a double data rate (DDR) mode. In the SDR mode, one data bit is accessed (i.e., written to or retrieved from the memory device) for each device input/output (I/O) pin and on each active clock cycle. In the DDR mode, two data bits are accessed for each device I/O pin on each active clock cycle. The memory devices
20 may further be designed to support other operating modes such as a block write mode in which a block of data bits is concurrently written to memory.

Larger memory devices typically include many device I/O pins to support concurrent access of many data bits. The memory cells within a memory device are coupled to the I/O pins through a structure of interconnections. As the number of I/O
25 pins increases and the number of memory cells in the memory device grows, the interconnection structure also grows in complexity. Moreover, the data input and output circuits to interface the memory cells to the device I/O pins become more complicated, particularly if the memory device is required to support a number of operating modes.

Memory devices are also designed to meet various timing specifications.
30 When the operating speed is slow, these timing specifications can be more easily satisfied because of the longer clock period. However, as the operating speed increases, it becomes more challenging to meet these timing requirements. More complicated timing circuits are typically required to generate triggering signals for synchronous circuits

within the memory device to ensure conformance with the input and output timing specifications.

As can be seen, data input and output circuits that can support multi data rate operation and a number of different timing schemes are highly desirable.

5

SUMMARY OF THE INVENTION

The invention provides data input and output circuits for use in an integrated circuit (e.g., a memory device) and capable of supporting multi data rate read and write operations and a number of timing schemes. The data input and output circuits include appropriate circuitry to receive data bits, latch the received data bits with triggering signals having the appropriate timing characteristics, multiplex (i.e., order) the data bits to generate data bits in the proper order, and provide the necessary signal drive. The triggering signals can have different timing characteristics, and are selected based on a particular operating mode of the memory device.

10

15

20

25

An embodiment of the invention provides a data output circuit that includes a first (input) multiplexer, data latches, and at least one output driver. The input multiplexer receives a set of data bits in a first order and provides the data bits in a second order. The data latches can latch the data bits in the second order with a latch signal to satisfy memory access timing requirements, and can further latch the data bits with a data write clock signal to satisfy output timing requirements. The data output circuit typically further includes a second (output) multiplexer that multiplexes the latched data bits to provide time multiplexed data bits. The output driver(s) receive and provide signal drive for the time multiplexed data bits. To achieve variable drive capability, a number of output drivers can be designed such that they can be individually enabled and disabled (e.g., all output drivers can be disabled to place the data output circuit a tri-state condition).

30

The signals used to trigger the synchronous circuits in the data output circuit can have different timing characteristics to allow the data output circuit to satisfy various timing requirements. For example, the latch signal can have a phase (e.g., delayed by a particular amount) that is selected based on an operating mode of the data output circuit. Also, the data read clock signal can be generate based on one of a number of clock signals, again depending on the particular operating mode, and may further have an adjustable phase determined, for example, by a delay lock loop circuit. The data bits

provided to the input multiplexer can be prefetched from a memory array based on the falling edge of an input clock signal.

For a specific implementation that supports DDR read operation, the input multiplexer receives data bits associated with even and odd memory addresses and provides the data bits in first and second temporal order. One memory address can be provided for each pair of odd and even data bits and the other address can be generated internally based on a particular addressing scheme. For ease of implementation, the even and odd memory addresses can be consecutively numbered.

Another embodiment of the invention provides a data input circuit that includes a demultiplexer, a multiplexer, and a number of driver circuits. The demultiplexer can be implemented with a first set of latches that latches a sequence of time multiplexed data bits with a number of phases of a latch signal (which may be generated from a DQS signal) to provide a number of sequences of data bits. The multiplexer orders the sequences of data bits to provide ordered sequences. The data input circuit typically further includes a second set of latches that latches the ordered sequences with a data write clock signal. Each driver circuit then receives a respective sequence from the second set of latches and drives a respective data line.

For DDR write operation, the sequence of time multiplexed data bits includes two data bits per active cycle of an input clock signal and is demultiplexed into a first sequence of data bits corresponding to a first phase (e.g., rising edge) of the input clock signal and a second sequence of data bits corresponding to a second phase of the input clock signal. The multiplexer then orders the first and second sequences to provide an even sequence of data bits to be provided to memory cells having even addresses and an odd sequence of data bits to be provided to memory cells having odd addresses.

Yet another embodiment of the invention provides a memory unit that includes decoding circuitry, at least one memory array, conditioning circuitry, and a number of output circuits. The decoding circuitry receives address information and generates a set of control signals. The memory array(s) provide a number of sets of data values in response to the generated control signals, and the conditioning circuitry conditions the sets of data values to provide sets of data bits. Each output circuit receives a respective set of data bits and drives a respective data line. The output circuits can be designed as described above. The memory unit may further include a number of input circuits that facilitates the writing of data bits to the memory array(s).

Yet another embodiment of the invention includes a method for providing a number of data bits to an output node in a multi data rate operation. In accordance with the method, a set of data bits is received and ordered to provide ordered data bits that are then latched to provide latched data bits. The latched data bits can then be multiplexed
5 into a sequence of time multiplexed data bits, which is then provided to the output node.

For DDR read operation, the received data bits can correspond to even and odd memory addresses and the ordered data bits can correspond to first and second temporal order to be provided to the output node. The data latching can include: (1) latching the ordered data bits with a latch signal to fulfill (e.g., memory access) timing
10 requirements, (2) latching the first latched data bits with a data read clock signal to provide second latched data bits, and (3) latching one of the second latched data bits with the inverted data read clock signal to properly align the data bits. The latch signal and data read clock signal can be generated as described in detail below.

Yet another embodiment of the invention includes a method for providing
15 a number of data bits to a memory array in a multi data rate operation. In accordance with the method, a sequence of time multiplexed data bits is received and demultiplexed into a number of sequences of data bits. The demultiplexing typically includes latching the time multiplexed data bits with a number of phases of a data latch signal to generate a number of sequences of data bits. The sequences are then ordered to provide ordered
20 sequences. The ordered sequences may further be latched with a data write clock signal to generate sequences of latched data bits that are then provided to the memory array.

For DDR write operation, the sequence of time multiplexed data bits includes two data bits per active cycle of an input clock signal, and is demultiplexed into first and second sequences of data bits corresponding to first and second phases of the
25 input clock signal. The first or second sequence is then selected as an even sequence to be provided to even-numbered address memory cells, and the other second or first sequence is selected as an odd sequence to be provided to odd-numbered address memory cells.

The data output and input circuits and the methods described above can be
30 advantageously implemented within an integrated circuit, a DRAM device, and other devices. Various other aspects, embodiments, and features of the invention are described in further detail below.

The foregoing, together with other aspects of this invention, will become more apparent when referring to the following specification, claims, and accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1A is a diagram of a specific embodiment of a memory device;

FIG. 1B is a diagram of a specific embodiment of a memory array and a datapath within the memory device;

FIG. 2 is a simplified diagram of some of the circuitry within the memory device;

FIG. 3A is a block diagram of an addressing and data output structure for an access of two data bits in a double data rate (DDR) mode;

FIG. 3B is a block diagram of an embodiment of a data output architecture capable of providing a set of data bits from a memory array to a DQ pad in a memory read operation;

FIG. 3C is a diagram of an embodiment of the multiplexer, registers and shifter, output multiplexer, and output driver of a data output circuit;

FIGS. 4A and 4B are timing diagrams for a DDR read operation to read two data bits from the memory array on each active clock cycle for a fast and a slow input clock signal CLKIN, respectively;

FIG. 5 is a block diagram of an embodiment of a data input architecture capable of writing a set of data bits provided on a DQ pad to the memory array in a memory write operation;

FIGS. 6A through 6C are timing diagrams for a DDR write operation to write two data bits to two memory cells on each active clock cycle of the input clock signal CLKIN for a nominal, minimum, and maximum t_{DQSS} delay, respectively;

FIG. 7 is a diagram of an embodiment of the clock generation within the memory device;

FIG. 8 is a schematic diagram of an embodiment of a 2x1 multiplexer; and

FIG. 9 is a schematic diagram of an embodiment of an output driver.

DESCRIPTION OF THE SPECIFIC EMBODIMENTS

For clarity, the invention is described for a specific implementation of a memory device. However, the specific details are intended to be illustrative, and not limitations, of the present invention. It will be recognized that alternative

5 implementations of the invention and modifications of the circuits and architectures described herein can be made (e.g., to satisfy a particular design requirement), and these modifications and variations are within the scope of the invention.

FIG. 1A is a diagram of a specific embodiment of a memory device 100. In this embodiment, memory device 100 includes four memory arrays 110a through 110d, with each memory array 110 including two memory banks 120a and 120b. Each memory bank 120 includes an upper half 130a and a lower half 130b. A control circuit 140
10 couples to memory arrays 110a through 110d and provides the necessary control signals, clock signals, and reference voltages. Additional control and support circuitry may be dispersed throughout memory device 100. Some of these circuits are described below, as necessary for the understanding of the invention.

As shown in FIG. 1A, each memory array 110 is associated with a datapath 150 that interconnects the memory cells in the memory array to an associated set of data input/output (I/O) pads 160, one data I/O pad for each device data I/O pin. The I/O pads and I/O pins are also referred to as DQ pads and DQ pins, respectively.
20 Additional pad sections 160e and/or 160f are provided for control signals, clock signals, address lines, power supplies, ground, and other inputs and outputs.

Generally, the memory device can include greater or fewer number of memory arrays, each memory array can include greater or fewer number of memory banks, and each memory bank can be configured differently than that shown in FIG. 1A. In certain embodiments, memory device 100 is DRAM device having at least 64 million
25 bits (Mbits) of memory, and each memory array includes at least 16 Mbits of memory.

Each memory array 110 includes memory cells for many data bits. The memory cells are typically arranged in a two-dimensional array. A word line selects a particular row within the memory array, and a column select line selects a particular
30 column. Thus, each memory cell is identified by a unique combination of word line and column select line. A set of word line drivers associated with each memory array activates the word lines for that memory array, and a column decoder associated with each memory bank activates the column select lines for that memory bank. In an

embodiment, a column decoder 142 is associated with each array 120. The word line drivers and portions of the column decoders are implemented within control circuit 140.

The word lines and column select lines are activated in accordance with memory addresses provided by a source external or internal to memory device 100. The generation of the control signals is described in further detail in U.S. Patent Application Serial No. 09/427,150, entitled "Clock-Based Transparent Refresh Mechanisms for DRAMs," filed October 25, 1999, assigned to the assignee of the present invention and incorporated herein by reference.

In an embodiment, the memory cells in each memory array are arranged into a number of sections, with each section corresponding to a particular set of memory addresses. For example, in an implementation that advantageously supports double data rate (DDR) operation, the memory cells are arranged into odd and even sections, with the odd section including memory cells having odd-numbered addresses and the even section including memory cells having even-numbered addresses. For a DDR memory access, two data bits are retrieved from, or written to, an even and an odd section of the memory array for each "active" clock cycle.

FIG. 1B is a diagram of a specific embodiment of memory array 110 and datapath 150. In this embodiment, datapath 150 is partitioned into two sets of alternating even section 152 and odd section 154 that are associated with corresponding even and odd sections of memory array 110. Datapath 150 couples to a set of global data lines 156, two of which are shown in FIG. 1B. Each global data line 156 traverses the length of the associated memory array and couples to a respective set of memory cells. Datapath 150 further couples to an associated set of DQ pads 160 via a set of pad lines 158 (one DQ pad 160x and one pad line 158 are shown in FIG. 1B). Via the DQ pads, pad lines, datapath, and global data lines, input data bits are written to the memory cells in the memory device and stored data bits are read from the memory cells.

A design of a datapath that supports a number of different operating modes is disclosed in U.S. Patent Application Serial No. 09/236,509, entitled "Memory Array Datapath Architecture," filed January 25, 1999, assigned to the assignee of the present invention and incorporated herein by reference.

FIG. 2 is a simplified diagram of some of the circuitry within memory device 100. As shown in FIG. 2, memory device 100 includes an address buffer 210 for receiving an input address and providing buffered address information to a row decoder 212 and a column decoder 214. Row decoder 212 activates one or more row control lines

(or word lines) 216 for the selected memory cell(s), as determined by the address information received from buffer 210. For a multi-data rate operation, row decoder 212 may select two or more of word lines to allow concurrent access to multiple memory cells.

5 Similarly, column decoder 214 activates one or more column select lines (CSLs) 218 for the selected memory cell(s), as determined by the address information received from address buffer 210. Column select lines 218 couple to a sense amplifier and I/O control circuit 220. Circuit 220 further couples to a memory array 110x and data input/output circuits 240. Circuit 220 provides the signal conditioning and drive for the
10 signals to and from memory array 110x. Circuit 220 further provides the control and signal buffering for the signals to and from data input/output (I/O) circuits 240. Circuits 240 provide signal buffering and drive for retrieved data bits to be provided to the DQ pads, signal buffering for input data bits to be provided to the memory array, and other functions. A timing circuit 250 generates the clock and control signals for various
15 synchronous circuits within memory device 100.

FIG. 3A is a block diagram of an addressing and data output structure for an access of two data bits in the DDR mode. To access two data bits, an address of the memory cell for the first data bit is provided and the address of the memory cell for the second data bit is (internally) generated by an address generator 302 from the first address based on a particular addressing scheme. For example, in one simple scheme, the second
20 address is generated by simply incrementing the first address by one. For ease of implementation, the two accessed data bits typically have consecutively numbered addresses (i.e., ADDR and ADDR+1), but this is not a necessary condition. For the above design, address generator 302 generates an odd address and an even address for
25 memory array 110. Address generator 302 further generates a signal SBIT indicative of the particular order of the odd and even-numbered data bits being accessed.

In an embodiment, memory array 110 is arranged such that concurrent memory access of a number of data bits can be achieved. In an embodiment, to support concurrent access of two data bits in the DDR mode, the memory cells in each memory
30 array are arranged into even-numbered address memory cells and odd-numbered address memory cells. Appropriate support circuitry (e.g., data sense amplifiers) is provided to allow for concurrent access of one even-numbered address memory cell (or simply, even memory cell) and one odd-numbered address memory cell (or simply, odd memory cell) for each active clock cycle.

The odd and even-numbered data bits are prefetched from memory array 110 and provided to an output data multiplexer 304. In an embodiment, the memory cells being accessed are not restricted to any particular order of even and odd addresses. For example, an even memory cell may be accessed before an odd memory cell (e.g., memory cells with addresses xxxx0 and xxxx1) or an odd memory cell may be accessed before an even memory cell (e.g., memory cells with addresses xxxx1 and xxxx0). Thus, after the data in the memory cells are prefetched, the data bits from the even and odd memory cells are appropriately arranged such that they are provided to the DQ pad in the proper order. This is achieved with the signal SBIT from address generator 302.

FIG. 3B is a block diagram of an embodiment of a data output architecture 300 capable of providing a set of data bits from the memory cells in memory array 110 to pad 160x. Architecture 300 is one implementation of output data multiplexer 304. A portion of data output architecture 300 is incorporated within sense amplifier and I/O control circuit 220 and the remaining portion is incorporated within data I/O circuits 240.

For a memory read operation in the DDR mode, the word lines and column select lines for memory array 110 are appropriately selected and activated such that two data bits from two memory cells are prefetched and provided on two sets of differential global data lines GD_E 156a and GD_O 156b to two data sense amplifiers (DSAs) 310a and 310b. Each data sense amplifier 310 senses the signal on the associated differential data lines 156 and provides an output signal having a value (e.g., “0” or “1”) indicative of the sensed signal. As indicated in FIG. 3B, data sense amplifier 310a senses the even memory cell and data sense amplifier 310b senses the odd memory cell. The even and odd data bits from data sense amplifiers 310a and 310b are provided via respective data lines DWR_E and DWR_O to a data output circuit 320.

Within data output circuit 320, a multiplexer 330 receives the even and odd data bits on respective data lines DWR_E and DWR_O, selects either the even or odd data bit as the first data bit to be provided to the DQ pad (depending on the memory address), and selects the other odd or even data bit as the second data bit to be provided to the DQ pad. The first and second data bits are then provided via respective data lines DWR_0 and DWR_1 to registers and shifter 340.

Registers and shifter 340 latches the data bits on data lines DWR_0 and DWR_1 with the appropriate clock signals, as described below, and also provides a one-half clock cycle of delay for the second data bit to be provided to the DQ pad. The time aligned data bits are then provided from registers and shifter 340 via two respective data

lines QV_0 and QV_1 to an output multiplexer 350 that multiplexes both data bits onto one data line GT. The multiplexed data bits are then provided to an output driver 360 that buffers the data bits and drives DQ pad 160x.

FIG. 3C is a diagram of an embodiment of multiplexer 330, registers and shifter 340, output multiplexer 350, and output driver 360 of data output circuit 320. The even and odd data bits on data lines DWR_E and DWR_O are respectively provided to 2x1 multiplexers 332a and 332b. Multiplexer 332a selects either the even or odd data bit as the first bit to be provided to the DQ pad, depending on a control signal SBIT which is generated based on the memory address, and provides the selected data bit to data line DWR_0. Similarly, multiplexer 332b selects either the odd or even data bit as the second bit to be provided to the DQ pad, again depending on the control signal SBIT, and provides the selected data bit to data line DWR_1.

The first and second data bits from multiplexers 332a and 332b are then provided to latches 342a and 342b, respectively. Each latch 342 latches the received data bit with a latch signal DRLAT3 and provides the latched data bit to a respective register 344. Latching the data bits with the latch signal DRLAT3 allows data output circuit 320 to support a number of read modes. Each read mode corresponds to a particular timing relationship between a read command and when data is available from a data buffer. For example, the read modes can include the various column address select (CAS) latencies (i.e., timing delays) such as the CAS latency 2 and CAS latency 3 described in U.S. Patent No. 5,986,945, entitled "Memory Device Output Circuit Having Multiple Operating Modes," issued November 16, 1999, assigned to the assignee of the present invention and incorporated herein by reference. Typically, the read mode is known a priori before the device is accessed, and may be determined from a value stored in a mode setting register. Latches 342 thus ensure that the data bits from the memory cells are triggered in a manner that satisfies the timing specifications. In certain designs, latches 342 may be omitted if support for these different various timing modes (e.g., CAS latency 3) is not required nor desired. For example, latches 342 may be removed or forced ON for CAS latency 2.

The latched data bits from latches 342a and 342b are respectively provided to registers 344a and 344b, which register the received first and second data bits with a data read clock signal CLKDR. The second data bit from register 344b is then provided to a latch 346 and latched with a clock signal CLKDR. Latch 346 provides a half clock cycle of delay for the second data bit.

In accordance with an aspect of the invention, the data read clock signal CLKDR has different timing characteristics for different read modes. These timing characteristics are designed and selected to meet the system timing requirements and are described in further detail below. For example, the data read clock signal CLKDR may
 5 be generated from one of several clock signals. Alternatively or additionally, the clock signal CLKDR may be delayed by different amounts for different read modes.

The data bits from register 344a and latch 346 are then provided via respective data lines QV_0 and QV_1 to a 2x1 multiplexer 352 that multiplexes the data bits onto one output data line GT. The time multiplexed data bits on data line GT are
 10 then provided to a set of line drivers 362a through 362n. Each line driver 362 also receives a respective control signal CTRL_i (where i = 0, 1, 2, ... or n) and, when enabled by the control signal, drives DQ pad 160x.

In an embodiment, zero or more line drivers 362 can be enabled at any given moment. Zero line drivers 362 are enabled, for example, when DQ pad 160x is
 15 operative to receive data bits to be written to the memory array. One or more line drivers 362 are enabled to provide data bits to the DQ pad. The number of line drivers enabled is typically based on the required drive strength. Generally, as more line drivers are enabled, the drive strength increases and the signal transitions are enhanced (i.e., sharpened). The line drivers can be designed to provide approximately equal drive
 20 strengths (e.g., by designing the line drivers with similar physical dimensions) or different drive strengths. For example, line driver 362a may be designed to provide half the drive strength of line driver 362b, which may be designed to provide half the drive strength of line driver 362c, and so on.

FIG. 4A is a timing diagram for a DDR read operation to read two data
 25 bits from the memory array on each active clock cycle for a fast input clock signal CLKIN. The input clock signal CLKIN is generated by buffering a clock signal VCLK provided on one of the device pins. In the embodiment shown in FIG. 4A, the rising edge of the clock signal CLKIN is used to generate the latch signal DRLAT3 and an output clock signal CLKOUT. Generation of the clock signals is described in further detail
 30 below. The falling edge of the clock signal CLKIN is used to access the memory cells and the accessed data bits are available on data lines DWR_E and DWR_O some delay period later (i.e., delayed by t_{DATA} from the falling edge of the input clock signal CLKIN).

As shown in FIG. 4A, the latch signal DRLAT3 has falling edges that are delayed relative to the rising edges of the input clock signal CLKIN by a delay period

t_{DRLAT3} . The rising edges of the latch signal DRLAT3 occur a particular time period $t_{WDRLAT3}$ after the falling edges of the latch signal and are used to latch the data on data lines DWR_E and DWR_O. Since the memory access time t_{DATA} is typically fixed, the signal transitions on data lines DWR_E and DWR_O occur toward the rising edges of the latch signal DRLAT3 when the input clock signal CLKIN is fast. However, the latch signal DRLAT3 is designed (i.e., the rising edges are appropriately delayed) such that it is able to latch the data on data lines DWR_E and DWR_O on the rising edges. The latched data is then provided on data lines DRi_0 and DRi_1.

The output clock signal CLKOUT is the main clock signal used throughout the memory device to either latch the data on various data lines or to generate clock signals that are then used to latch the data. To provide output data that is aligned to the rising edges of the input clock signal CLKIN (which is required for some memory designs), a delay lock loop (DLL) is used to generate the output clock signal CLKOUT such that its rising edges lead the rising edges of the input clock signal CLKIN by a particular amount of time $t_{DCLKOUT}$. The lead time $t_{DCLKOUT}$ allows the output clock signal CLKOUT to be used to trigger the data such that it is aligned with the input clock signal CLKIN at the device pins. The output clock signal CLKOUT is thus advanced relative to the input clock signal CLKIN by an amount $t_{DCLKOUT}$ that is dependent on the system requirements and the particular memory design (e.g., $t_{DCLKOUT} \approx 1.5$ nsec in some memory device designs).

In accordance with an aspect of the invention, a number of read and write modes are provided to support different read and write timing schemes. Each read or write mode is associated with a particular set of clock signals used for writing data bits to the memory device or reading data bits from the memory device. The clock signals in each read or write mode are selected such that the timing requirements are met. The particular read or write mode can be selected by a mode setting register, a control signal provided internally or by an external source, fuses, or by some other mechanisms.

In an embodiment, the supported modes include a DLL_ON mode and a DLL_OFF mode. The DLL_ON mode is characterized by the use of a delay locked loop (DLL) to generate the clock signals and other triggering signals, and the DLL_OFF mode is characterized by the use of the input clock signal CLKIN to generate some of the clock signals used for triggering the data. Since the delay locked loop can adjust the timing of the clock signals to ensure fulfillment of the timing specifications, the DLL_ON mode

can be used for a fast input clock signal CLKIN and the DLL_OFF mode can be used for a slow input clock signal CLKIN.

The delay locked loop can also be used to adjust for timing skews within the memory device. Referring back to FIG. 1A, each set of data I/O pads 160 is located at a respective corner of the integrated circuit and receives a respective set of one or more clock signals for clocking data from the memory device. Due to layout and other factors, the timing between the four sets of data I/O pads may have different timing. The delay locked loop can be used to adjust the timing of the clock signals such that the data provided on the four sets of pads are properly aligned.

In an embodiment, the data read clock signal CLKDR is generated based on the output clock signal CLKOUT in the DLL_ON mode (e.g., by delaying and inverting the output clock signal, as shown in FIG. 4A) and based on the input clock signal CLKIN in the DLL_OFF mode. The use of different clock signals to generate the data read clock signal CLKDR ensures that the timing specifications are met for different operating modes and conditions. The clock signals used for the generation of the data read clock signal CLKDR are shown in Table 1 and described in FIG. 7.

The rising edges of the data read clock signal CLKDR are used to register the first and second data bit on data lines DRi_0 and DRi_1. The registered second data bit is then latched with the data read clock signal CLKDR to provide a half clock cycle delay. As shown in FIG. 4A, after the registers and latch, the first data bit is provided on data line QV_0 on the rising edges of the data read clock signal CLKDR, and the second data bit is provided on data line QV_1 on the falling edges of the data read clock signal CLKDR.

The appropriately time-aligned data bits on data lines QV_0 and QV_1 are then multiplexed onto one data line GT by the output multiplexer with a clock signal CLKOP. In an embodiment, the clock signal CLKOP is generated based on the output clock signal CLKOUT in the DLL_ON mode (e.g., by delaying the output clock signal, as shown in FIG. 4A) and based on the input clock signal CLKIN in the DLL_OFF mode. Again, the clock signals used for the generation of the clock signal CLKOP are shown in Table 1 and described in FIG. 7. As shown in FIG. 4A, the first data bit on data line QV_0 is provided from the output multiplexer when the clock signal CLKOP is low, and the second data bit on data line QV_1 is provided from the multiplexer when the clock signal CLKOP is high. FIG. 4A shows a memory access of four data bits, which are provided to the DQ pad on two cycles of the input clock signal CLKIN.

Table 1

Signal	DLL_ON Mode	DLL_OFF Mode
DRLAT3	CLKIN	CLKIN
CLKDR	CLKOUT	CLKIN
CLKOP	CLKOUT	CLKIN
CLKDW	CLKIN	CLKIN

FIG. 4B is a timing diagram for a DDR read operation to read two data bits from the memory array for a slow input clock signal CLKIN. The memory cells are prefetched on the falling edges of the input clock signal CLKIN, and the accessed data bits are provided on data lines DWR_E and DWR_O a particular delay later. The data access delay t_{DATA} is typically the same regardless of the speed of the input clock signal CLKIN. The latch signal DRLAT3 is also generated from the rising edges of the input clock signal CLKIN and has falling edges that are delayed relative to the rising edges of the input clock signal CLKIN by the delay period t_{DRLAT3} . However, because of the longer input clock cycle, the timing margin between the signal transitions on data lines DWR_E and DWR_O and the rising edges of the latch signal DRLAT3 is greater when the input clock signal is slow. The subsequent timing and data latching in FIG. 4B is similar to that in FIG. 4A.

FIG. 5 is a block diagram of an embodiment of a data input architecture 500 capable of writing a set of data bits provided on pad 160x to memory array 110. The data bits to be written to the memory array are provided via DQ pad 160x to data input circuit 510. Within data input circuit 510, a buffer 512 receives and buffers the data bits and provides the buffered bits to registers 514a and 514b. For a DDR write operation, two data bits are provided on each active cycle of the input clock signal CLKIN.

A memory device is typically provided with a data strobe signal VDQS that indicates the availability of data on the device data pins. For a DDR write, each data bit is associated with a rising or falling edge on the data strobe signal VDQS and is provided to meet the specified setup and hold time requirements such that the associated VDQS edge can be used to latch the data bit within the memory device. The rising edges of the data strobe signal VDQS are aligned to the rising edges of the input clock signal CLKIN within a specified time period (e.g., $\pm 0.25t_{CLKIN}$, where t_{CLKIN} is the period of the input clock signal CLKIN). In a nominal case, the t_{DQSS} delay between the data strobe

signal VDQS and the input clock signal CLKIN is approximately zero. However, the worse case delay between the data strobe signal VDQS and the input clock signal CLKIN is typically specified to be $0.25t_{CLKIN}$. Thus, the maximum t_{DQSS} delay is $+0.25t_{CLKIN}$ and minimum t_{DQSS} delay is $-0.25t_{CLKIN}$, where $+t_{DQSS}$ indicates the data strobe signal VDQS leading the input clock signal CLKIN and $-t_{DQSS}$ indicates the data strobe signal VDQS lagging the input clock signal CLKIN.

The buffered data bits are then provided to registers 514a and 514b that register the data bits with the rising and falling edges of a signal CLKDQS. The signal CLKDQS is generated by buffering the data strobe signal VDQS and is closely aligned to the VDQS signal. The registered data bit from register 514a is then latched with the signal CLKDQS to provide a half clock cycle of delay to appropriately align the pair of data bits provided on each active clock cycle. The data bit from latch 516 and the data bit from register 514b are then provided via respective data lines DW_0 and DW_1 to multiplexers 518a and 518b.

Analogous to the memory read operation described above, the data bits to be written to the memory device are not restricted to any particular order of even and odd addresses. For example, the first data bit may correspond to an even memory address and the second data bit may correspond to an odd memory address, or vice versa. Thus, after the data bits are latched, they are appropriately routed to the even and odd data lines DW_E and DW_O to be written to the proper memory cells.

Multiplexer 518a selects either the first or second data bit as the even data bit to be provided to the memory array, depending on a control signal BSEL which is generated based on the memory address. Similarly, multiplexer 518b selects either the second or first data bit as the odd data bit to be provided to the memory array depending on the control signal BSEL. The even and odd data bits are then provided to respective latches 520a and 520b and latched with a data write clock signal CLKDW, which is generated from the input clock signal CLKIN as described below.

The latched data bits from latches 520a and 520b are then provided to respective drivers 522a and 522b, which buffer the data bits and drive data lines DWR_E and DWR_O to effectuate the writing of the data bits to memory.

FIG. 6A is a timing diagram for a DDR write operation to write two data bits to two memory cells on each active clock cycle of the input clock signal CLKIN for a nominal (i.e., ~ 0 nsec) t_{DQSS} delay. The input data DIN is provided with the input data

strobe signal VDQS. The data strobe signal VDQS is gated such that an edge is provided for each data bit (i.e., the data strobe signal VDQS transitions from a high-Z state to a logic low pre-amble, to a state where the required clock edges are provided for the data burst, then to a logic low post-amble, and then to the high-Z state). The rising edge of the data strobe signal VDQS is typically specified to be within $\pm 0.25 t_{\text{CLKIN}}$ of the rising edge of the input clock signal CLKIN. For a nominal t_{DQSS} delay of ~ 0.0 nsec, the rising edge of the data strobe signal VDQS is approximately aligned with the rising edge of the input clock signal CLKIN. The signal CLKDQS is generated by buffering the data strobe signal VDQS and used to latch the input data bits.

As shown in FIG. 5, the first data bit is registered with the rising edge of the signal CLKDQS by register 514a and the second data bit is registered with the falling edge of the signal CLKDQS (i.e., bCLKDQS) by register 514b. Each register is implemented with two latches coupled in series. The first latch latches the data with the indicated triggering signal (i.e., the signal CLKDQS for register 514a and the signal bCLKDQS for register 514b). The second latch then re-latches the data with the inverted triggering signal. Thus, each register provides the registered data bit on the opposite edge of the indicated triggering signal. Register 514a thus provides the first data bit on the falling edge of the signal CLKDQS and register 514b provides the second data bit on the rising edge of the signal CLKDQS. The first data bit from register 514a is then latched with the rising edge of the signal CLKDQS to provide a half cycle of delay. After the registers and latch, the first and second data bits are approximately aligned to the rising edge of the signal CLKDQS and provided on data lines DW_0 and DW_1.

The first and second data bits are then latched with a data write clock signal CLKDW, which is generated based on the input clock signal CLKIN. Since the rising edge of the data strobe signal VDQS is specified to be within $\pm 0.25 t_{\text{CLKIN}}$ of the rising edge of the input clock signal CLKIN, and the data bits are initially latched with the signal CLKDQS that is generated from and slightly delayed relative to the data strobe signal VDQS, the data write clock signal CLKDW is delayed relative to the input clock signal CLKIN by at least $0.25 t_{\text{CLKIN}}$. This ensures that the input data bits, after having been latched by the signal CLKDQS, will be properly latched by the data write clock signal CLKDW. Thus, as shown in FIG. 6A, the data write clock signal CLKDW is generated from the input clock signal CLKIN and delayed by a time period t_{DCLKDW} . The

data bits on data lines DW_0 and DW_1 are latched with the data write clock signal CLKDW and provided on data lines DWR_E and DWR_O.

FIGS. 6B and 6C are timing diagrams for a DDR write operation for a minimum and maximum t_{DQSS} delay, respectively. When the t_{DQSS} delay is at the minimum specified value as shown in FIG. 6B, the rising edge of the data strobe signal VDQS (and thus the signal CLKDQS) is $0.25t_{CLKIN}$ earlier than that of the input clock signal CLKIN. The data bits on data lines DW_0 and DW_1 are thus shifted left by the same amount (i.e., $0.25t_{CLKIN}$), but can still be properly latched with the data write clock signal CLKDW and provided on data lines DWR_E and DWR_O.

Conversely, when the t_{DQSS} delay is at the maximum specified value as shown in FIG. 6C, the rising edge of the data strobe signal VDQS (and thus the signal CLKDQS) is $0.25t_{CLKIN}$ later than that of the input clock signal CLKIN. The data bits on data lines DW_0 and DW_1 are shifted right by the same amount (i.e., $0.25t_{CLKIN}$), but can still be properly latch with the data write clock signal CLKDW and provided on data lines DWR_E and DWR_O.

FIG. 7 is a diagram of an embodiment of the clock generation portion of control circuit 140. In an embodiment, as described above, the data read clock signal CLKDR used to trigger the data bits from the memory array and the clock signal CLKOP used to provide the accessed data bits to the DQ pad in a memory read operation are each generated from either the input clock signal CLKIN or the output clock signal CLKOUT.

In accordance with an aspect of the invention, a delay locked loop (DLL) circuit 710 receives the input clock signal CLKIN (or the chip input clock signal used to generate the clock signal CLKIN) and generates the output clock signal CLKOUT having the characteristics shown in FIG. 4A and described above. Delay locked loop circuit 710 adjusts the phase of the output clock signal CLKOUT such that its rising edges lead the rising edges of the input clock signal CLKIN by a particular amount (e.g., 1.5 nsec) determined necessary to allow for proper alignment the data bits to the input clock signal CLKIN at the device I/O pins. The design of the delay locked loop circuit is known in the art and not described in detail herein. An example design of a delay locked loop circuit is described in U.S. Patent No. 5,963,069, titled "System for Distributing Clocks Using a Delay Lock Loop in a Programmable Logic Circuit," issued October 5, 1999 and incorporated herein by reference.

The output clock signal CLKOUT from delay locked loop circuit 710 is provided to a delay adjust circuit 712 that delays the signal by an amount determined by a

control signal CLKOUT_ADJ. The input clock signal CLKIN and a control signal DLL_OFF are provided to a NAND gate 714, which disables the input clock signal when not operating in the DLL_ON mode. The output from NAND gate 714 is provided to a delay adjust circuit 716 that delays the signal by an amount determined by a control

5 signal CLKIN_ADJ. Delay adjust circuits 712 and 716 allow for adjustment of the output and input clock signals used for data read operations such that various read timing schemes can be supported. The control signals CLKOUT_ADJ and CLKIN_ADJ determine the amounts of delay and can be provided by mode setting registers, fuses, control lines, or other mechanisms. For example, the control signals CLKOUT_ADJ and

10 CLKIN_ADJ can each be provided by means of fuses that are programmed during testing of the device in the manufacturing process.

The phase adjusted clock signals from delay adjust circuits 712 and 716 are provided to a multiplexer 720 that selects the delayed output clock signal when operating in the DLL_ON mode and the delayed input clock signal when operating in the

15 DLL_OFF mode. The output from multiplexer 720 comprises the clock signal CLKOP used for providing the accessed data bits to the DQ pad during a memory read operation. The output from multiplexer 720 is also provided to a pair of series-coupled inverters 732a and 732b and a delay circuit 734. The signal from inverter 732b and the delayed signal from delay circuit 734 are provided to a multiplexer 736 that selects the signal

20 from inverter 732b when operating in the DLL_ON mode and the delayed signal when operating in the DLL_OFF mode. Inverters 732 and delay circuit 734 provide a timing difference between the DLL_OFF and DLL_ON modes. The output from multiplexer 736 comprises the data read clock signal CLKDR. In an embodiment, one clock generation circuit such as that shown in FIG. 7 is provided for each set of data I/O pads

25 160 (i.e., each set of data I/O pads receives a respective clock signal CLKOP and data read clock signal CLKDR).

The input clock signal CLKIN is used to generate the latch signal DRLAT3 that is used for latching the prefetched data bits during a memory read operation (e.g., for CAS latency 3). The input clock signal CLKIN is provided to a delay

30 circuit 740 that delays the clock signal by a particular amount. The input clock signal CLKIN and the delayed input clock signal from delay circuit 740 are provided to a multiplexer 742 that selects the input clock signal CLKIN when operating in the DLL_ON mode and the delayed clock signal when operating in the DLL_OFF mode. The clock signal CLK1 from multiplexer 742 is provided to a delay circuit 744 and to one

input of a NAND gate 746. Delay circuit 744 delays the clock signal CLK1 by a particular amount and provides the delayed signal to the other input of NAND gate 746. The output from NAND gate 746 comprises the latch signal DRLAT3.

The falling edges of the latch signal DRLAT3 are delayed relative to the rising edges of the input clock signal CLKIN (by the delays of multiplexer 742 and NAND gate 746 when operating in the DLL_ON mode, and by the delays of delay circuit 740, multiplexer 742, and NAND gate 746 when operating in the DLL_OFF mode). Delay circuit 744 determines the low pulse width of the latch signal DRLAT3. The latch signal DRLAT3 may be generated based on the falling edge of CLKIN for a different timing setup.

The input clock signal CLKIN is also provided to a delay circuit 750 and delayed by a particular amount (i.e., t_{DCLKDW}). As noted above, the delay of delay circuit 750 is selected to account for the variations in the t_{DQSS} delay of $\pm 0.25t_{CLKIN}$. The output of delay circuit 750 comprises the data write clock signal CLKDW used for memory write operations.

FIG. 8 is a schematic diagram of an embodiment of a 2x1 multiplexer 800 that can be used for the 2x1 multiplexers in FIGS. 3B and 5. The input signals IN_0 and IN_1 are provided to the inputs of respective transmission gates 810a and 810b. Each transmission gate 810 comprises an N-channel transistor 812 coupled in parallel with a P-channel transistor 814. A control signal MUX_CTRL couples to a non-inverting control input of transmission gate 810a, an inverting control input of transmission gate 810b, and an input of an inverter 816. The control signal bMUX_CTRL from inverter 816 couples to an inverting control input of transmission gate 810a and a non-inverting control input of transmission gate 810b. The outputs of transmission gates 810a and 810b couple together and form the output of the 2x1 multiplexer.

An inverter 820 can be coupled to the output of the multiplexer to provide buffering, signal inversion, and additional signal drive. Inverter 820 comprises a P-channel transistor 820a coupled in series with an N-channel transistor 820b. The output of inverter 820 comprises the buffered and inverted output of multiplexer 800.

FIG. 9 is a schematic diagram of an embodiment of an output driver 900 that can be used for one output driver 362 in FIG. 3C. Output driver 900 receives differential input signals PGT and NGT and a control signal bCTRL_x, and drives the associated DQ pin based on the received signals. Output driver 900 is designed to operate

on a differential input signal. Other circuits in data output circuit 320 (e.g., register 344 and multiplexer 352) can also be designed to operate on and provide differential output signals.

The input signals PGT and NGT are provided to the inputs of respective transmission gates 910a and 910b. Each transmission gate 910 comprises an N-channel transistor 912 coupled in parallel with a P-channel transistor 914. The control signal bCTRL_x couples to the inverting control inputs of transmission gates 910a and 910b and an input of an inverter 916. The control signal CTRL_x from inverter 916 couples to the non-inverting control inputs of transmission gates 910a and 910b. The output of transmission gate 910a couples to the source of a P-channel transistor 920a and to the gate of a P-channel transistor 922a. The output of transmission gate 910b couples to the source of an N-channel transistor 920b and to the gate of an N-channel transistor 922b. The control signal bCTRL_x couples to the gate of transistor 920a, and the control signal CTRL_x couples to the gate of transistor 920b.

Output driver 900 is enabled when the control signal bCTRL_x is low and tri-stated when the control signal bCTRL_x is high. Output driver 900 operates as follows. When the control signal bCTRL_x is low, transmission gates 910a and 910b are turned on and the input signals PGT and NGT are provided to the gates of transistors 922a and 922b, respectively. Transistors 920a and 920b are also turned off when the control signal bCTRL_x is low, thereby enabling the operation of transistors 922a and 922b. Thus, when the control signal bCTRL_x is low, the DQ pin can be driven low or high by the input signals PGT and NGT. Conversely, when the control signal bCTRL_x is high, transmission gates 910a and 910b are turned off. Transistors 920a and 920b are also turned on, which then disables transistors 922a and 922b.

The data input and output circuits of the invention provide many advantages. The data input and output circuits support concurrent write and read of multiple data bits to and from multiple memory cells in a multi-data rate mode. The data input and output circuits also support a number of read and write modes, and can advantageously be used to support various timing requirements.

Although the invention is described for a specific embodiment, alternative implementations of the invention and modifications of the data input and output circuits described herein can be made. For example, the clock signals described herein can be generated in different manners and/or based on different signals. Further, the latching circuits and multiplexers described herein can be implemented with other circuits or

differently than that described above. Thus, the specific implementation details are intended to be illustrative, and not limitations, of the present invention.

The architectures described herein can support single data rate (SDR) operation as well as double data rate (DDR) operation. A more detail discussion of operating a memory array in DDR operation is included in U.S. Patent Application Serial No. 09/195,269, entitled "Memory Array Architecture for Multi-Data Rate Operation," filed November 18, 1998 and Serial No. 09/235,222, entitled "Memory Array Architecture Supporting Block Write Operation," filed January 22, 1999, both assigned to the assignee of the present invention and incorporate herein by reference.

The general inventive concepts described herein can be extended to concurrent memory access of any number of data bits. For example, the circuits described herein can be modified to support a quadruple data rate operation, an octal data rate operation, or a Q data rate operation (where Q is any integer greater than one).

The data input and output circuits described herein can be implemented within a stand-alone integrated circuit (IC) such as, for example, a dynamic random access memory (DRAM) IC, a synchronous graphics RAM (SGRAM), and other memory devices. The memory arrays can also be implemented within other ICs, such as a processor, a controller, a digital signal processor, an application specific integrated circuit (ASIC), and others. The circuits described herein can be implemented on a memory array that is embedded within an integrated circuit such as, for example, central processing unit (CPU).

The foregoing description of the preferred embodiments is provided to enable any person skilled in the art to make or use the present invention. Various modifications to these embodiments will be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other embodiments without the use of the inventive faculty. Thus, the present invention is not intended to be limited to the embodiments shown herein but is to be accorded the widest scope consistent with the principles and novel features disclosed herein, and as defined by the following claims.

WHAT IS CLAIMED IS:

1 1. A data output circuit comprising:
2 a multiplexer configured to receive a set of data bits and an output clock
3 signal, wherein the set of data bits is received in a first order and the output clock signal is
4 associated with one of a plurality of phases, and wherein the multiplexer is further
5 configured to multiplex the set of data bits with the output clock signal to provide time
6 multiplexed data bits in a second order; and
7 at least one output driver operatively coupled to the multiplexer and
8 configured to receive and provide signal drive for the time multiplexed data bits.

1 2. The data output circuit of claim 1, further comprising:
2 a clock generator configured to receive an input clock signal and provide
3 the output clock signal.

1 3. The data output circuit 2, wherein the clock generator includes
2 a delay lock loop circuit configured to provide a particular delay for the
3 output clock signal.

1 4. The data output circuit 3, wherein the delay provided by the delay lock
2 loop circuit is programmable.

1 5. The data output circuit of claim 1, wherein the phase of the output
2 clock signal is selected based at least in part on an operating mode of the data output
3 circuit.

1 6. A data output circuit comprising:
2 a first multiplexer configured to receive a set of data bits in a first order
3 and provide the set of data bits in a second order;
4 data latches coupled to the first multiplexer and configured to receive and
5 latch the set of data bits in the second order to provide a set of latched data bits; and
6 at least one output driver coupled to the data latches and configured to
7 receive and provide signal drive for the set of latched data bits.

1 7. The data output circuit of claim 6, where the first multiplexer in
2 configured to receive one or more pairs of data bits associated with even and odd memory
3 addresses and provide one or more corresponding pairs of data bits for first and second
4 temporal order to be provided from the at least one output driver.

1 8. The data output circuit of claim 7, where one of the even and odd
2 memory addresses is received and the other address is generate internally.

1 9. The data output circuit of claim 8, where the even and odd memory
2 addresses are consecutively numbered.

1 10. The data output circuit of claim 6, further comprising:
2 a second multiplexer coupled to the data latches and configured to receive
3 and multiplex the set of latched data bits to provide time multiplexed data bits, and
4 wherein the at least one output driver is configured to receive and provide
5 signal drive for the time multiplexed data bits.

1 11. The data output circuit of claim 10, wherein the data latches or the
2 second multiplexer, or both, is operable to provide the time multiplexed data bits based on
3 a clock signal having an adjustable phase.

1 12. The data output circuit of claim 11, further comprising:
2 a delay lock loop circuit configured to provide the clock signal having the
3 adjustable phase.

1 13. The data output circuit of claim 10, wherein the data latches are
2 operable to latch the set of data bits in the second order with a latch signal having a phase
3 that is selected based on an operating mode of the data output circuit.

1 14. The data output circuit of claim 6, wherein the data latches comprise
2 a set of latches configured to latch the set of data bits in the second order
3 with a latch signal.

1 15. The data output circuit of claim 14, wherein the latch signal is related
2 to an input clock signal provided for clocking out data bits.

1 16. The data output circuit of claim 15, wherein the latch signal is delayed
2 relative to the input clock signal by a selectable amount based on an operating mode of
3 the data output circuit.

1 17. The data output circuit of claim 6, wherein the data latches comprise
2 a set of registers configured to register the set of data bits in the second
3 order with a data read clock signal.

1 18. The data output circuit of claim 17, wherein the data read clock signal
2 is generate based on one of a plurality of clock signals depending on an operating mode
3 of the data output circuit.

1 19. The data output circuit of claim 18, wherein the data read clock signal
2 is further delayed by an amount depending on the operating mode of the data output
3 circuit.

1 20. The data output circuit of claim 6, wherein the data latches comprise
2 a set of latches configured to latch the set of data bits in the second order
3 with a latch signal, and
4 a set of registers configured to register the set of data bits from the set of
5 latches with a data read clock signal.

1 21. The data output circuit of claim 6, wherein the set of data bits in the
2 first order is provided from a memory array based on a falling edge of an input clock
3 signal.

1 22. The data output circuit of claim 6, wherein each of the at least one
2 output driver is configured to receive and provide signal drive for the time multiplexed
3 data bits, and wherein at least a subset of the at least one output driver can each be
4 individually enabled and disabled to provide variable drive capability.

1 23. The data output circuit of claim 22, wherein the at least one output
2 driver can be disabled to place the data output circuit in a tri-state condition.

1 24. The data output circuit of claim 6, and operable in a double data rate
2 (DDR) write operation wherein two data bits are received, ordered, latched, and provided
3 from the at least one output driver for each active clock cycle.

1 25. An integrated circuit comprising a plurality of data output circuits of
2 claim 6.

1 26. A DRAM device comprising at least 32 data output circuits of claim 6,
2 one data output circuit for each device data pin.

1 27. A data output circuit for use in a memory device comprising:
2 a first multiplexer configured to receive even and odd sequences of data
3 bits and provide first and second sequences data bits, wherein the even sequence includes
4 data bits prefetched from memory cells having even addresses and the odd sequence
5 includes data bits prefetched from memory cells having odd addresses, and wherein the
6 first sequence includes data bits to be provided from the data output circuit on a first
7 clock phase and the second sequence includes data bits to be provided on a second clock
8 phase;

9 a first set of latches coupled to the first multiplexer and configured to latch
10 the first and second sequences data bits with a latch signal;

11 a second set of latches coupled to the first set of latches and configured to
12 latch the sequences from the first set of latches with a data read clock signal;

13 a second multiplexer coupled to the second set of latches and configured to
14 receive and multiplex the sequences of latched data bits to provide a sequence of time
15 multiplexed data bits, and

16 at least one output driver coupled to the second multiplexer and configured
17 to receive and provide signal drive for the sequence of time multiplexed data bits.

1 28. A data input circuit comprising:

2 a demultiplexer configured to receive and demultiplex a sequence of time
 3 multiplexed data bits into a plurality of sequences of data bits;
 4 a multiplexer coupled to the demultiplexer and configured to receive and
 5 order the plurality of sequences of data bits to provide a plurality of ordered sequences;
 6 and
 7 a plurality of driver circuits coupled to the multiplexer, each driver circuit
 8 configured to receive a respective sequence of data bits from the multiplexer and drive a
 9 respective data line.

1 29. The data input circuit of claim 28, wherein the sequence of time
 2 multiplexed data bits includes two data bits per active cycle of an input clock signal, and
 3 wherein the plurality of sequences of data bits include a first sequence and a second
 4 sequence, the first sequence including data bits corresponding to a first phase of the input
 5 clock signal and the second sequence including data bits corresponding to a second phase
 6 of the input clock signal.

1 30. The data input circuit of claim 29, wherein the multiplexer is
 2 configured to receive and order the first and second sequences to provide an even
 3 sequence and an odd sequence, the even sequence including data bits corresponding to
 4 memory cells having even addresses and the odd sequence including data bits
 5 corresponding to memory cells having odd addresses.

1 31. The data input circuit of claim 28, wherein the demultiplexer includes
 2 a first set of latches configured to receive and latch the sequence of time
 3 multiplexed data bits with a plurality of phases of a latch signal to provide the plurality of
 4 sequences of data bits.

1 32. The data input circuit of claim 31, wherein the latch signal is
 2 generated from a DQS signal indicative of presence of valid data.

1 33. The data input circuit of claim 31, further comprising:
 2 a second set of latches configured to receive and latch the plurality of
 3 ordered sequences with a data write clock signal, and

wherein the plurality of driver circuits couple to the second set of latches and are configured to receive respective sequences of data bits from the second set of latches and drive respective data lines.

34. A data input circuit for use in a memory device comprising:
a demultiplexer configured to receive and demultiplex a sequence of time multiplexed data bits into first and second sequences of data bits, wherein the first sequence includes data bits from the sequence of time multiplexed data bits that are associated with a first clock phase and the second sequence includes data bits from the sequence of time multiplexed data bits that are associated with a second clock phase;
a multiplexer coupled to the demultiplexer and configured to receive the first and second sequences of data bits and provide even and odd sequences of data bits, wherein the even sequence includes data bits to be provided to memory cells having even addresses and the odd sequence includes data bits to be provided to memory cells having odd addresses;
a set of latches coupled to the multiplexer and configured to receive and latch the even and odd sequences of data bits with a data write clock signal; and
a plurality of driver circuits coupled to the set of latches, each driver circuit configured to receive a respective sequence of data bits from the set of latches and drive a respective data line.

35. A memory unit comprising:
decoding circuitry configured to receive address information and generate a set of control signals;
at least one memory array coupled to the decoding circuitry and configured to provide a plurality of sets of data values in response to the set of control signals;
conditioning circuitry coupled to the at least one memory array and configured to receive and condition the plurality of sets of data values to provide a plurality of sets of data bits; and
a plurality of output circuits coupled to the conditioning circuitry, each output circuit configured to receive a respective set of data bits and drive a respective data line, each output circuit including

13 a first multiplexer configured to receive and order the respective set
 14 of data bits,
 15 data latches coupled to the first multiplexer and configured to
 16 receive and latch the set of ordered data bits, and
 17 at least one output driver coupled to the data latches and configured
 18 to receive the set of latched data bits and drive the respective data line.

1 36. A method for providing a plurality of data bits to an output node in a
 2 multi data rate operation, the method comprising:
 3 receiving a set of data bits in a first order;
 4 ordering the set of data bits in the first order to provide the set of data bits
 5 in a second order;
 6 data latching the set of data bits in the second order to provide a set of
 7 latched data bits; and
 8 providing the set of latched data bits to the output node.

1 37. The method of claim 36, further comprising:
 2 multiplexing the set of latched data bits into a sequence of time
 3 multiplexed data bits.

1 38. The method of claim 36, wherein the set of data bits in the first order
 2 corresponds to even and odd memory addresses and the set of data bits in the second
 3 order corresponds to first and second temporal order to be provided to the output node.

1 39. The method of claim 36, wherein the data latching includes
 2 first latching the set of data bits in the second order with a latch signal to
 3 provide a set of first latched data bits.

1 40. The method of claim 39, wherein the data latching further includes
 2 second latching the set of first latched data bits with a data read clock
 3 signal to provide a set of second latched data bits.

1 41. The method of claim 39, wherein the data read clock signal is generate
2 based on one of a plurality of clock signals depending on a particular operation mode.

1 42. The method of claim 40, wherein the data latching further includes
2 third latching one data bit in the set of second latched data bits with a
3 signal related to the data read clock signal to provide a set of time aligned data bits.

1 43. The method of claim 36, wherein the set of latched data bits are
2 provided to the output node with variable drive strength.

1 44. A method for providing a plurality of data bits to a memory array in a
2 multi data rate operation, the method comprising:
3 receiving a sequence of time multiplexed data bits;
4 demultiplexing the sequence of time multiplexed data bits into a plurality
5 of sequences of data bits;
6 ordering the plurality of sequences of data bits to provide a plurality of
7 ordered sequences of data bits; and
8 providing the plurality of ordered sequences of data bits to the memory
9 array.

1 45. The method of claim 44, wherein the demultiplexing includes:
2 first latching the sequence of time multiplexed data bits with a plurality of
3 phases of a latch signal to generate the plurality of sequences of data bits.

1 46. The method of claim 44, further comprising:
2 second latching the plurality of ordered sequences of data bits with a data
3 write clock signal to generate a plurality of sequences of latched data bits.

1 47. The method of claim 44, wherein the sequence of time multiplexed
2 data bits includes two data bits per active cycle of an input clock signal, and wherein the
3 plurality of sequences of data bits include a first sequence and a second sequence, the first
4 sequence including data bits corresponding to a first phase of the input clock signal and

5 the second sequence including data bits corresponding to a second phase of the input
6 clock signal.

1 48. The method of claim 47, wherein the ordering includes
2 selecting either the first or second sequence as an even sequence to be
3 provided to even-numbered address memory cells, and
4 selecting the other second or first sequence as an odd sequence to be
5 provided to odd-numbered address memory cells.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216

DATA INPUT AND OUTPUT CIRCUITS FOR MULTI-DATA RATE OPERATION

ABSTRACT OF THE DISCLOSURE

5 Data input and output circuits that support multi data rate and a number of
timing schemes. In one design, a data output circuit includes an input multiplexer, data
latches, an output multiplexer, and at least one output driver. The input multiplexer receives
a set of data bits in a first order (e.g., odd and even) and provides the data bits in a second
order (e.g., first and second). The data latches can latch the data bits with (1) a latch signal to
10 satisfy memory access timing requirements and (2) a data write clock signal to satisfy output
timing requirements. The output multiplexer multiplexes the latched data bits to provide time
multiplexed data bits. The output driver(s) provide signal drive for the time multiplexed data
bits. Clock signals with various timing characteristics can be used to allow the data output
circuit to satisfy various timing requirements.




FIG. 1A

110

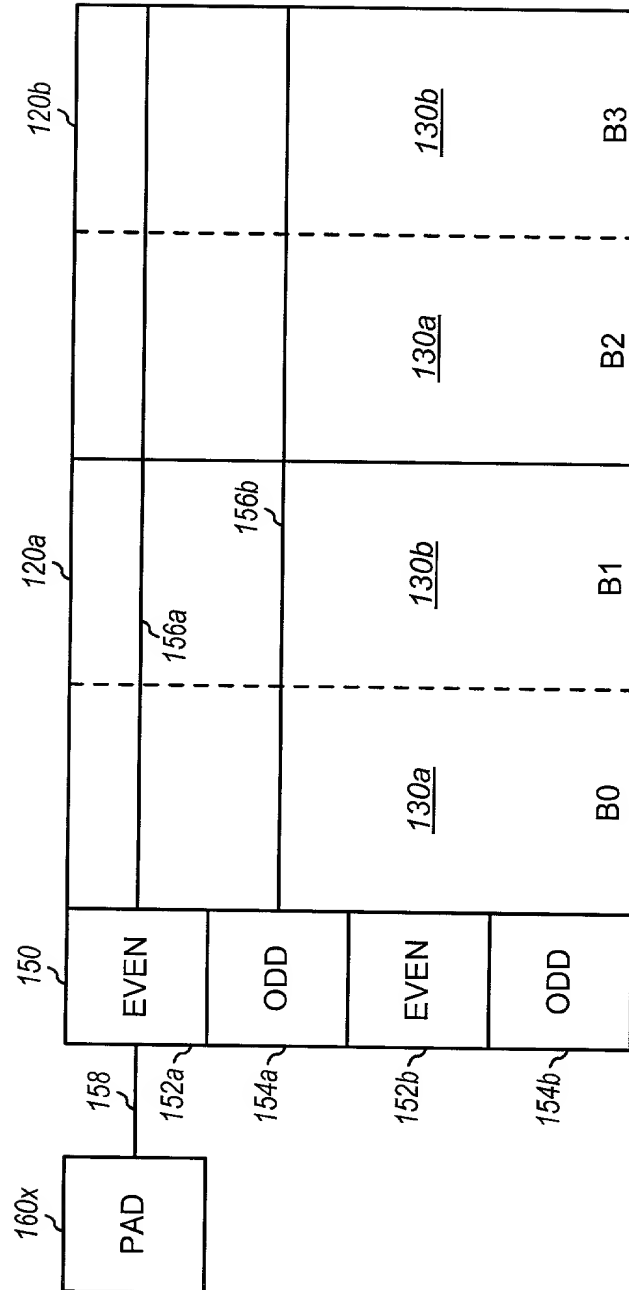


FIG. 1B

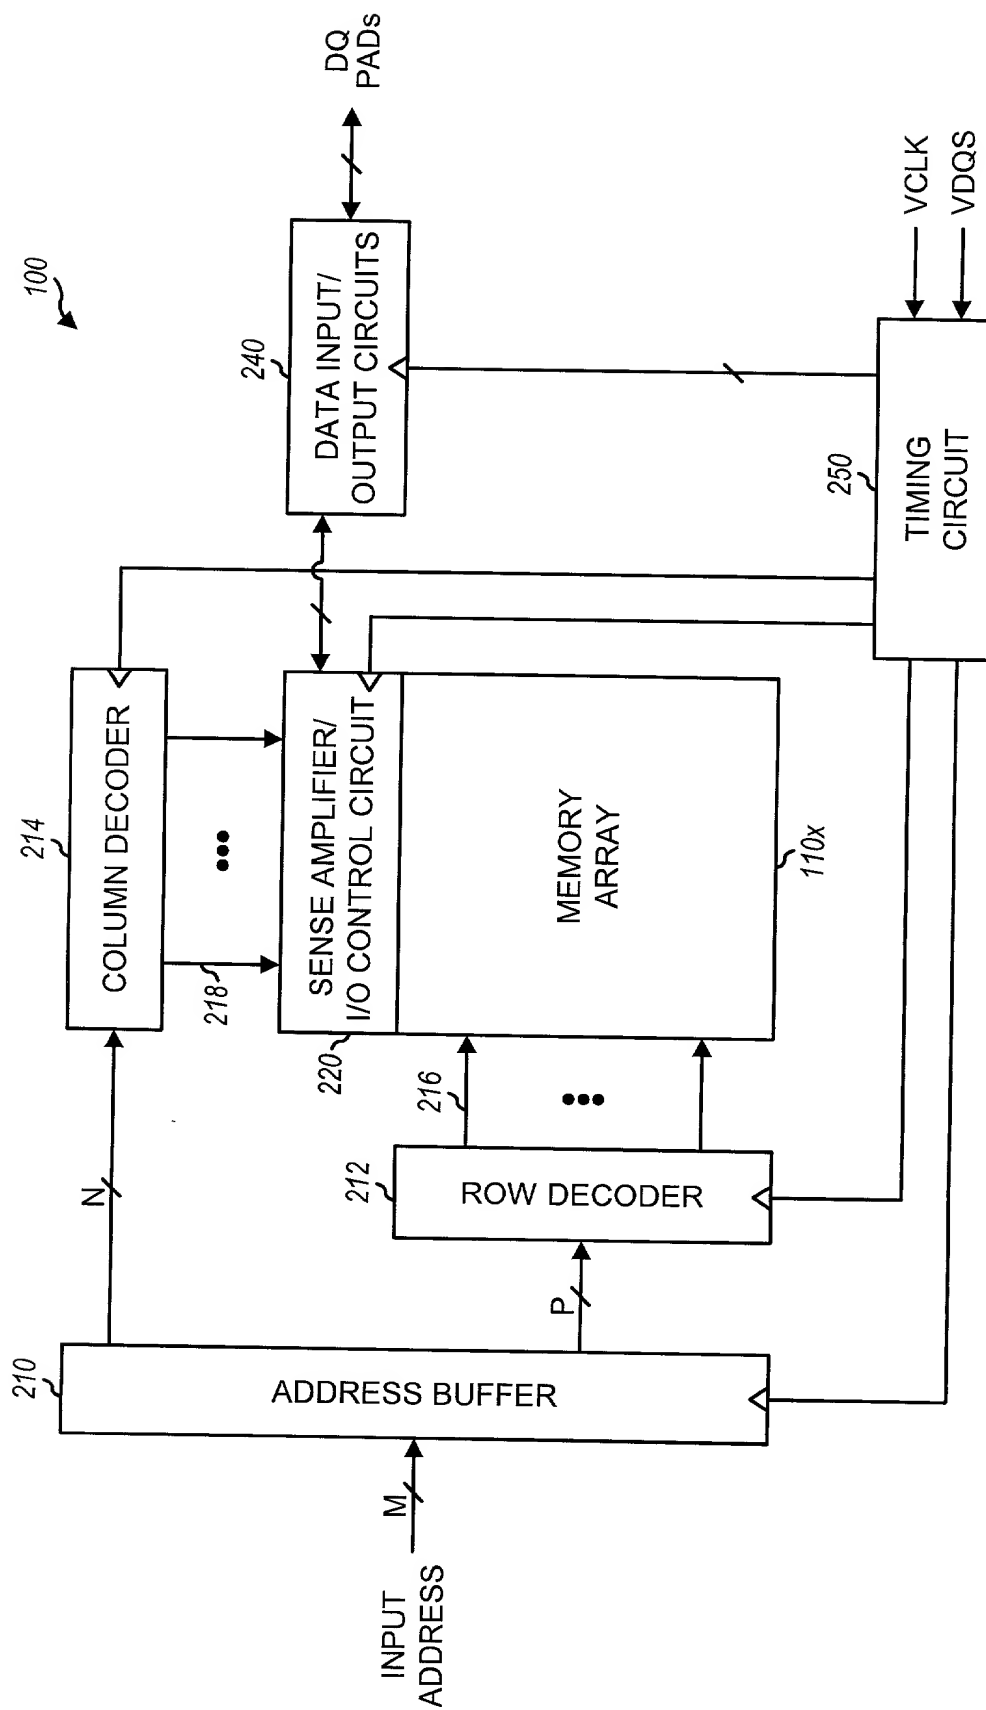


FIG. 2

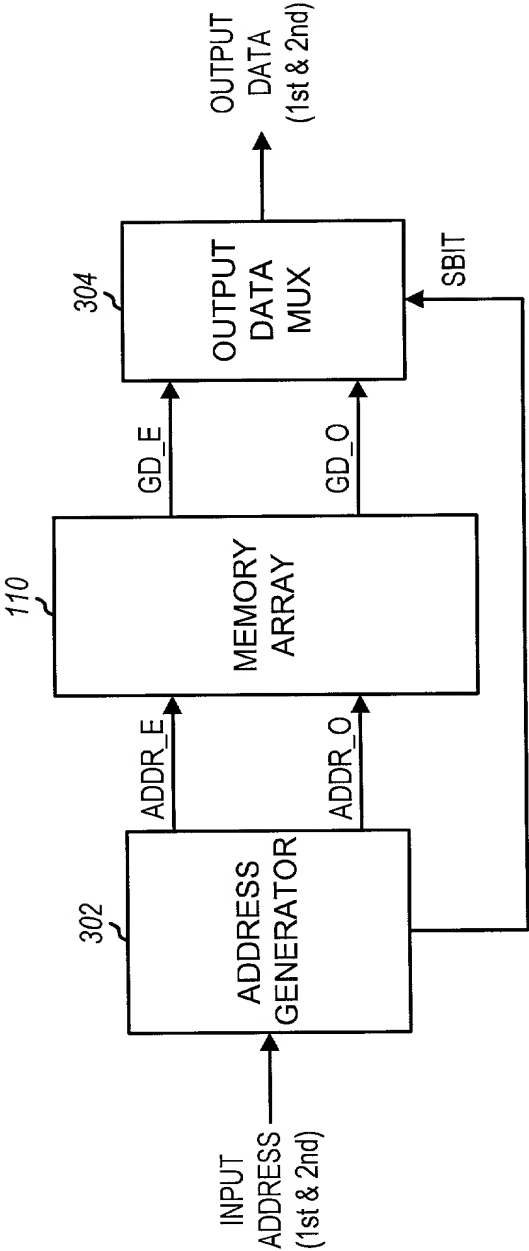


FIG. 3A

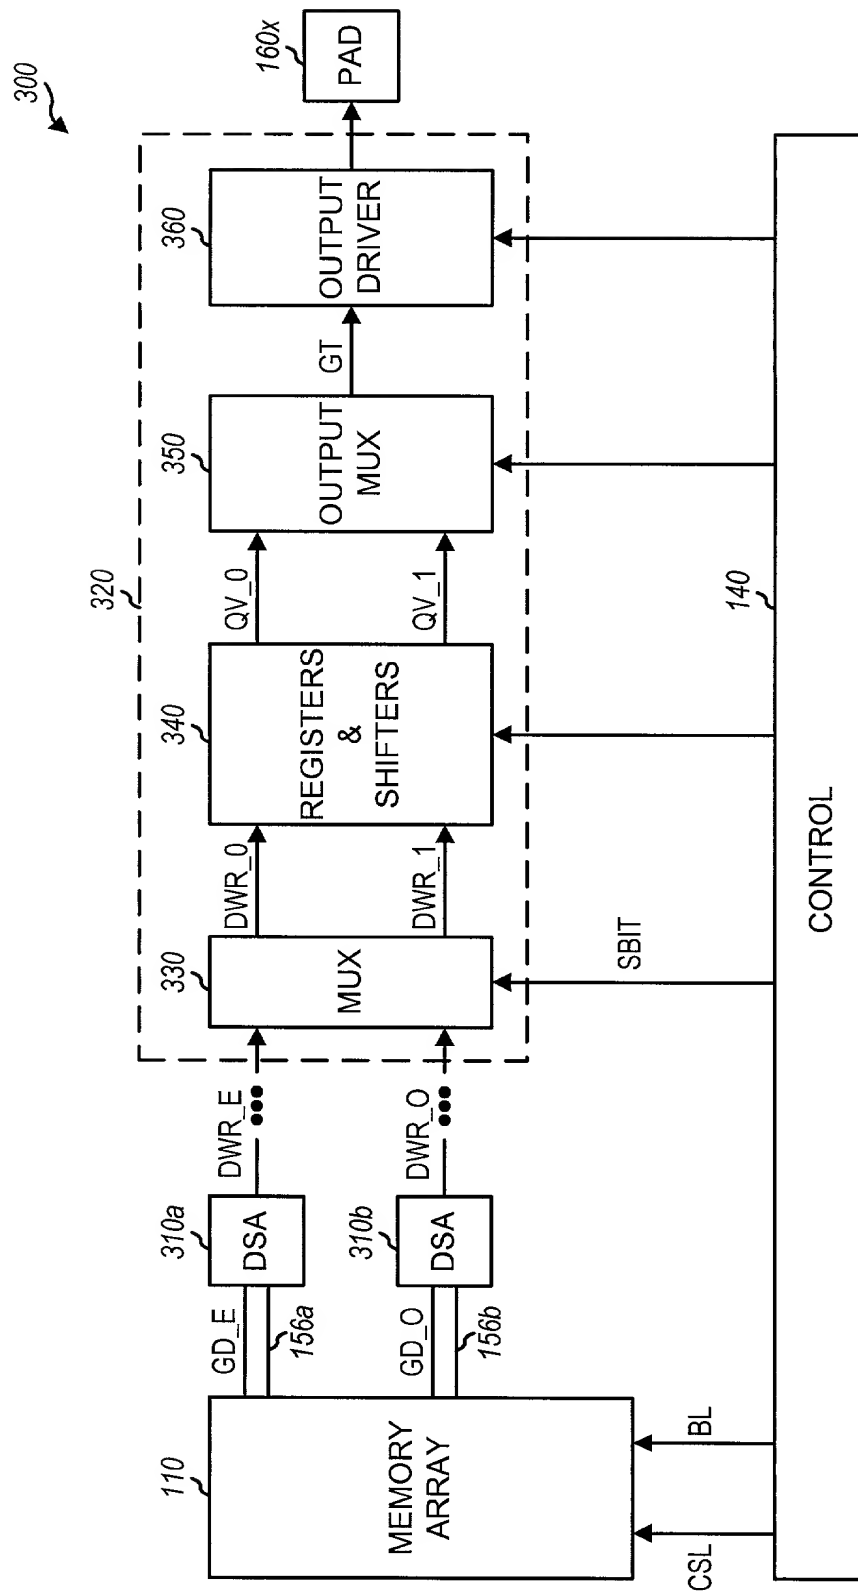


FIG. 3B

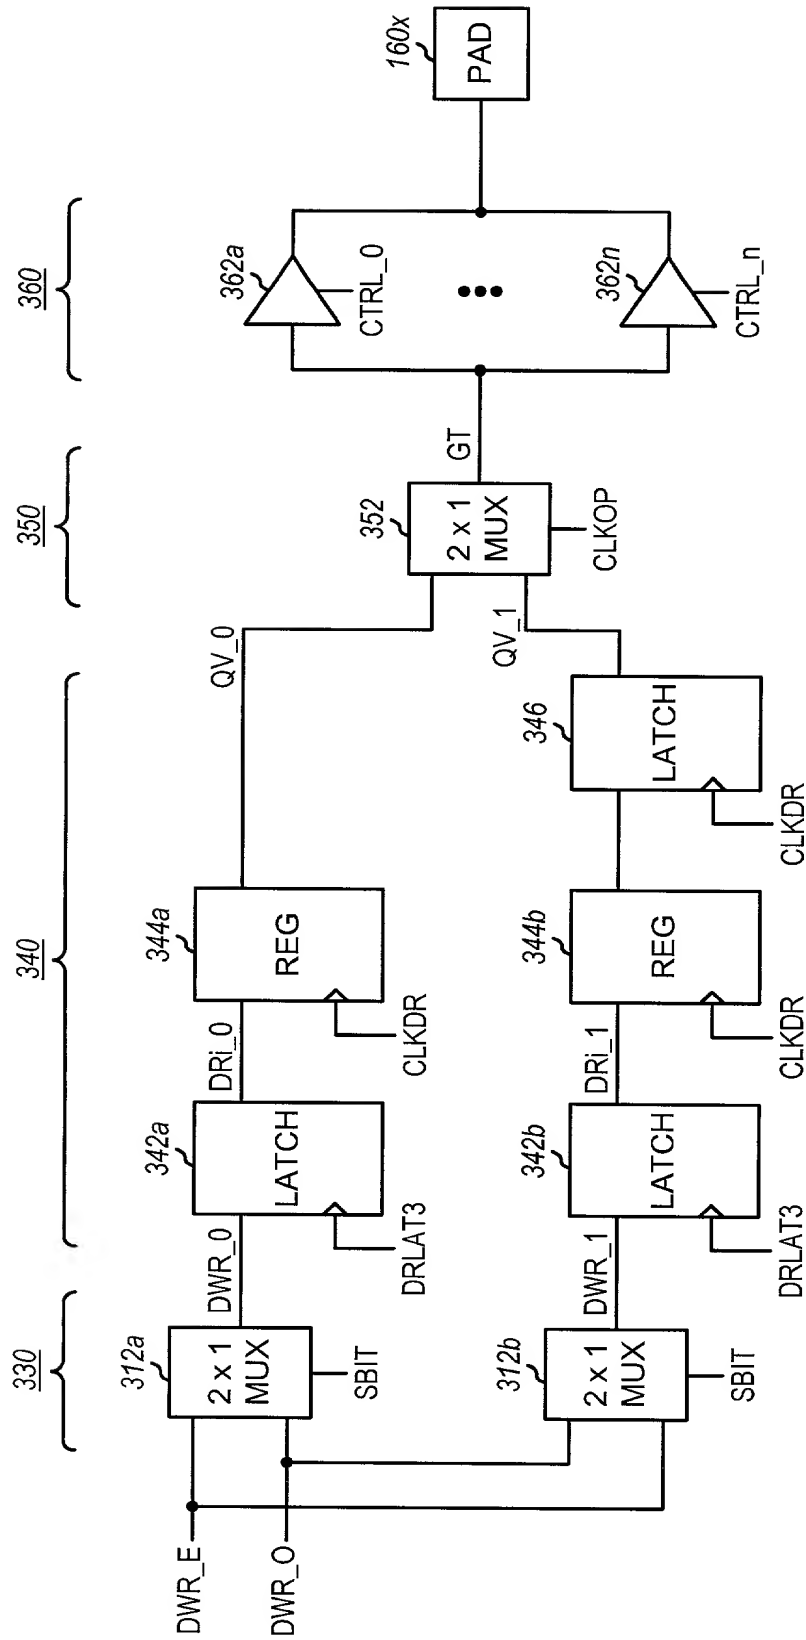


FIG. 3C

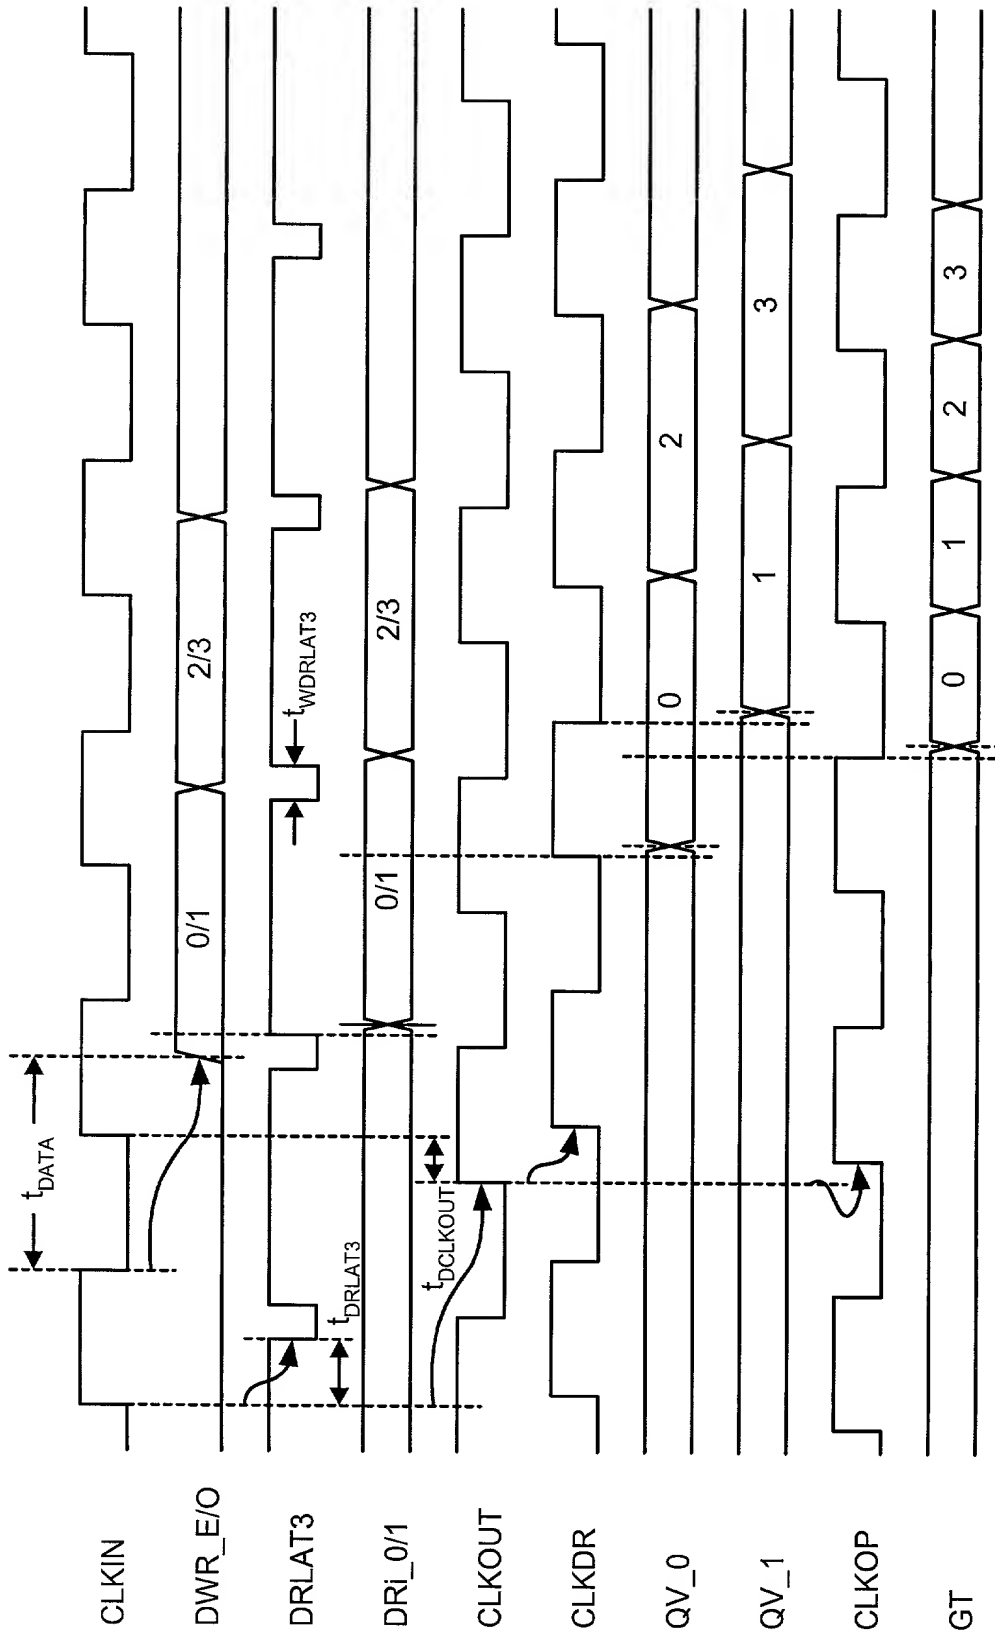


FIG. 4A

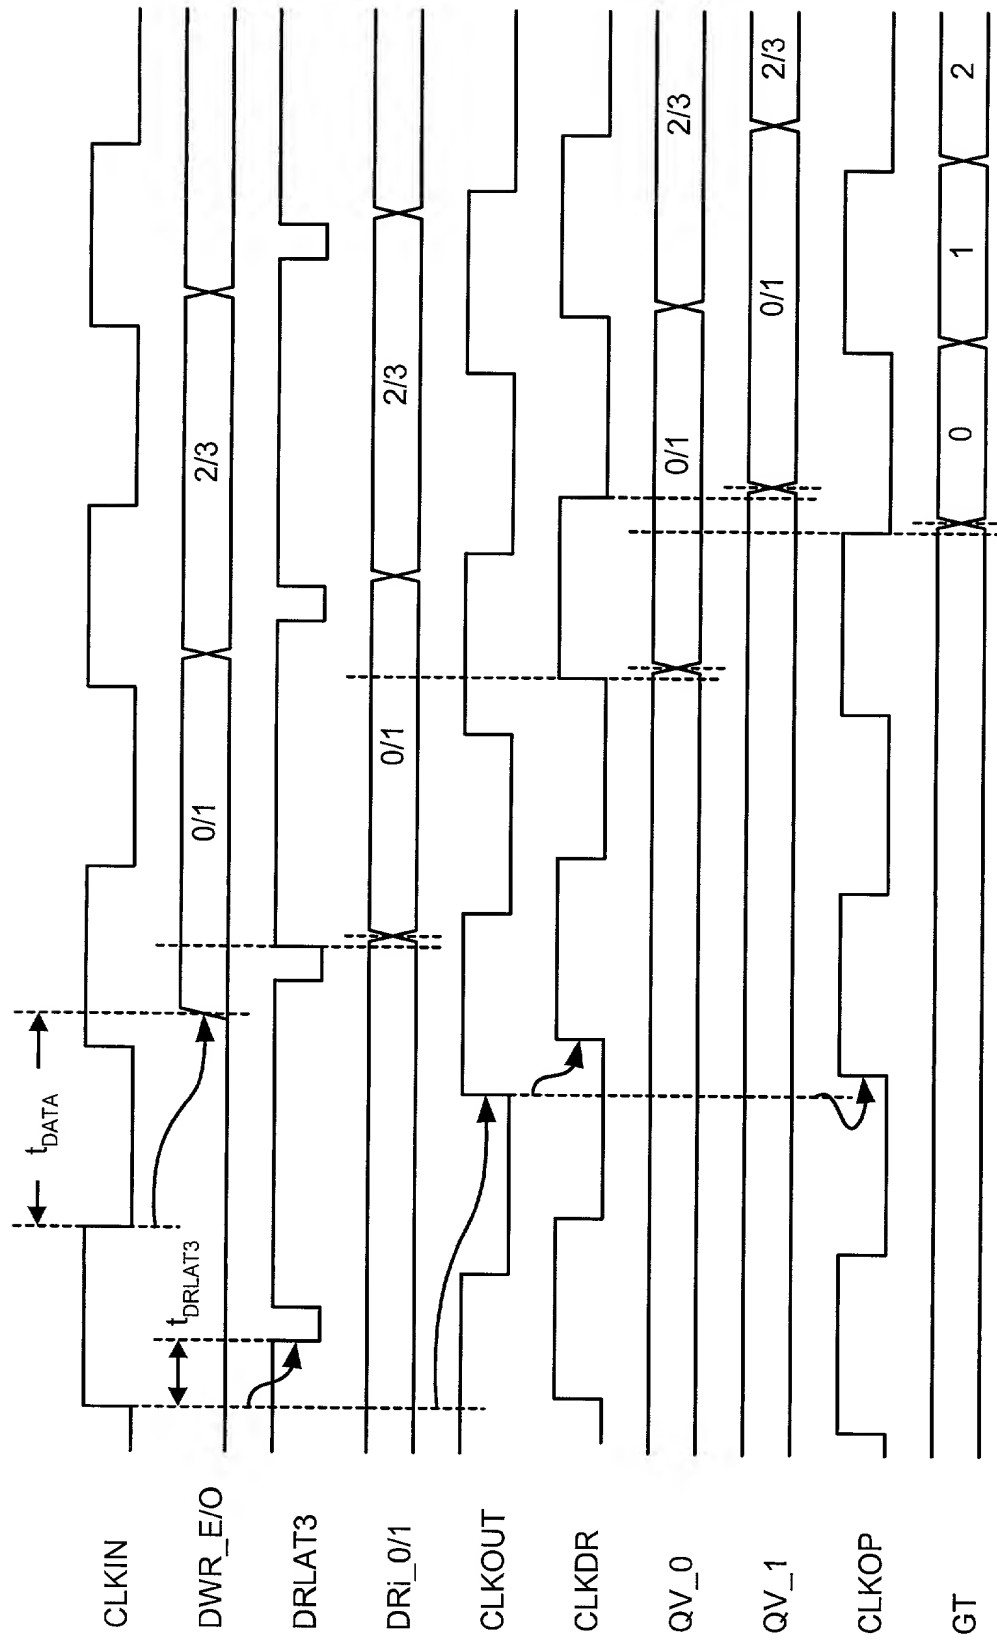


FIG. 4B

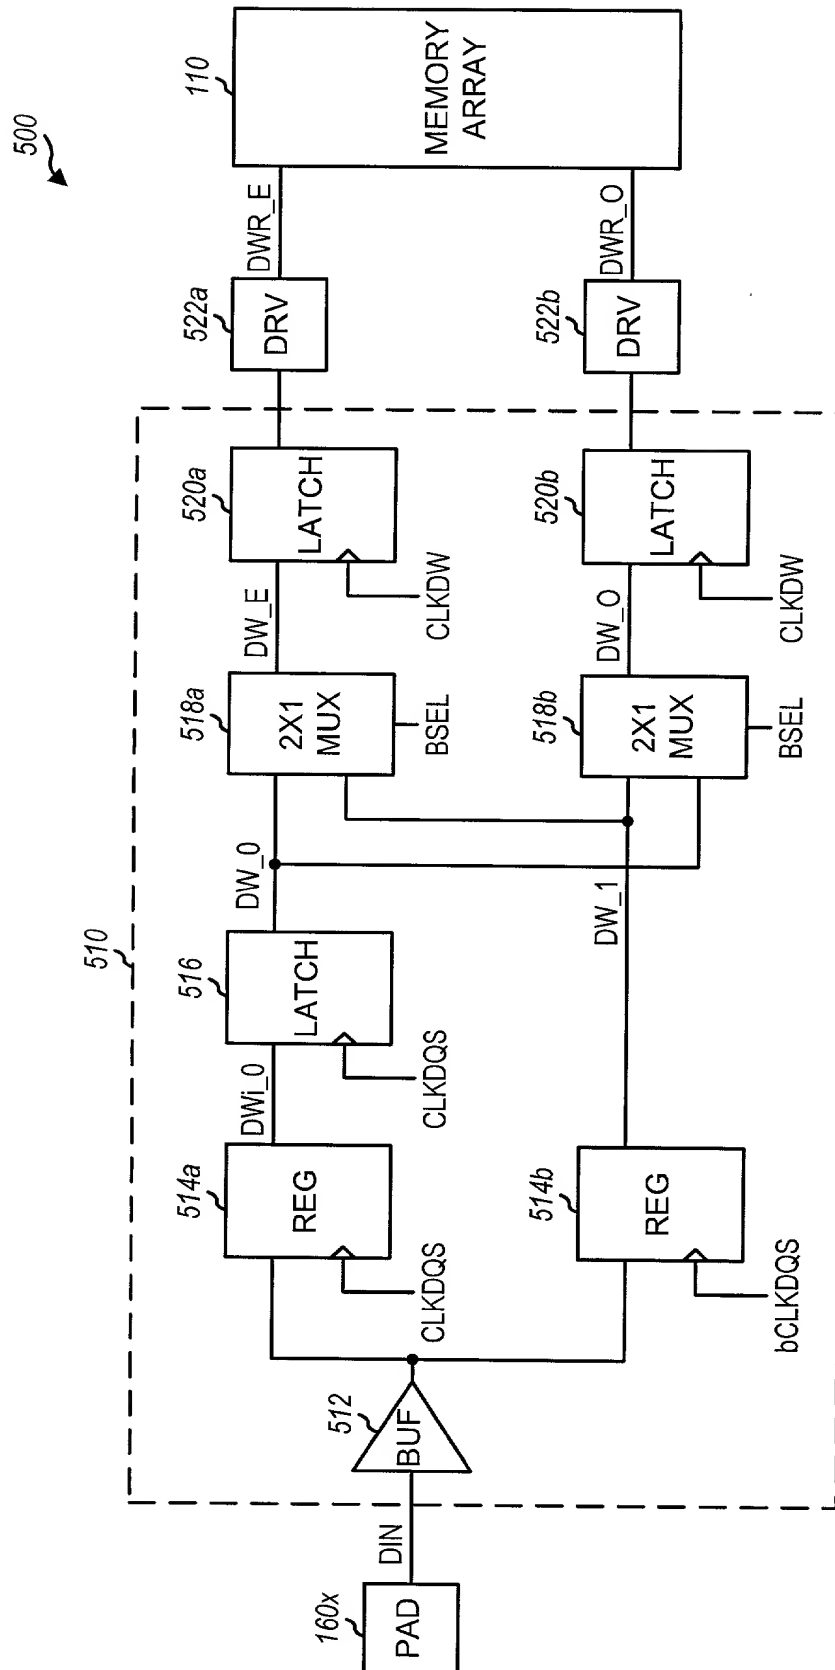


FIG. 5

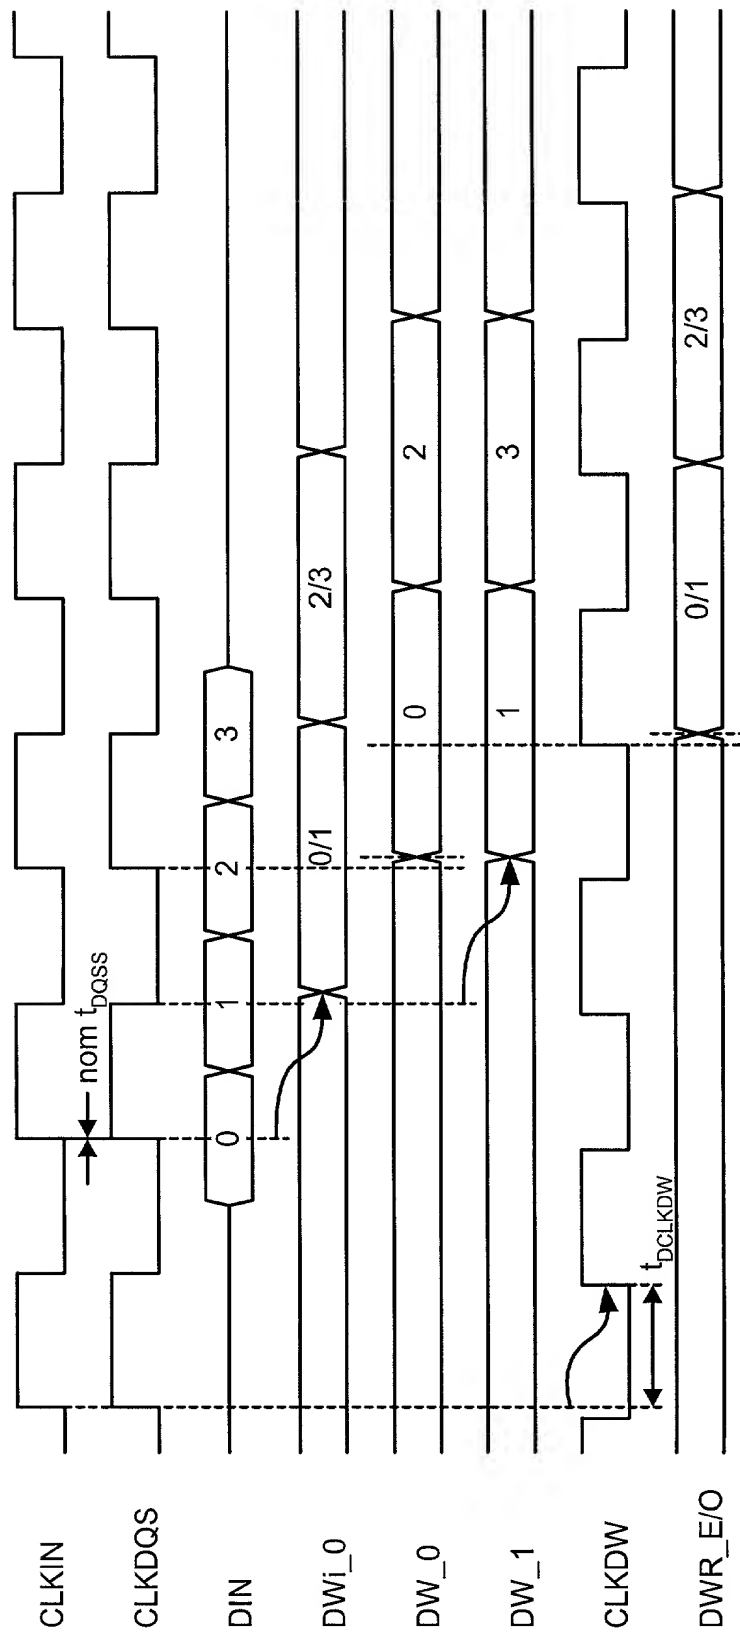


FIG. 6A

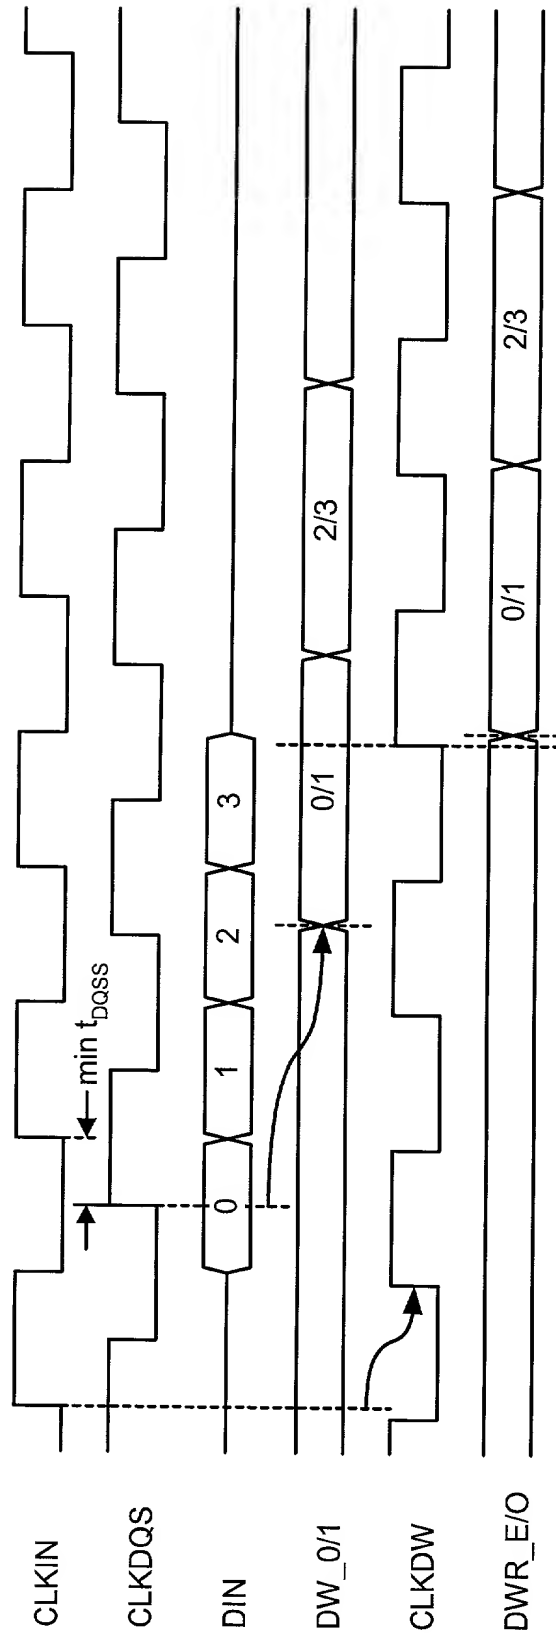


FIG. 6B

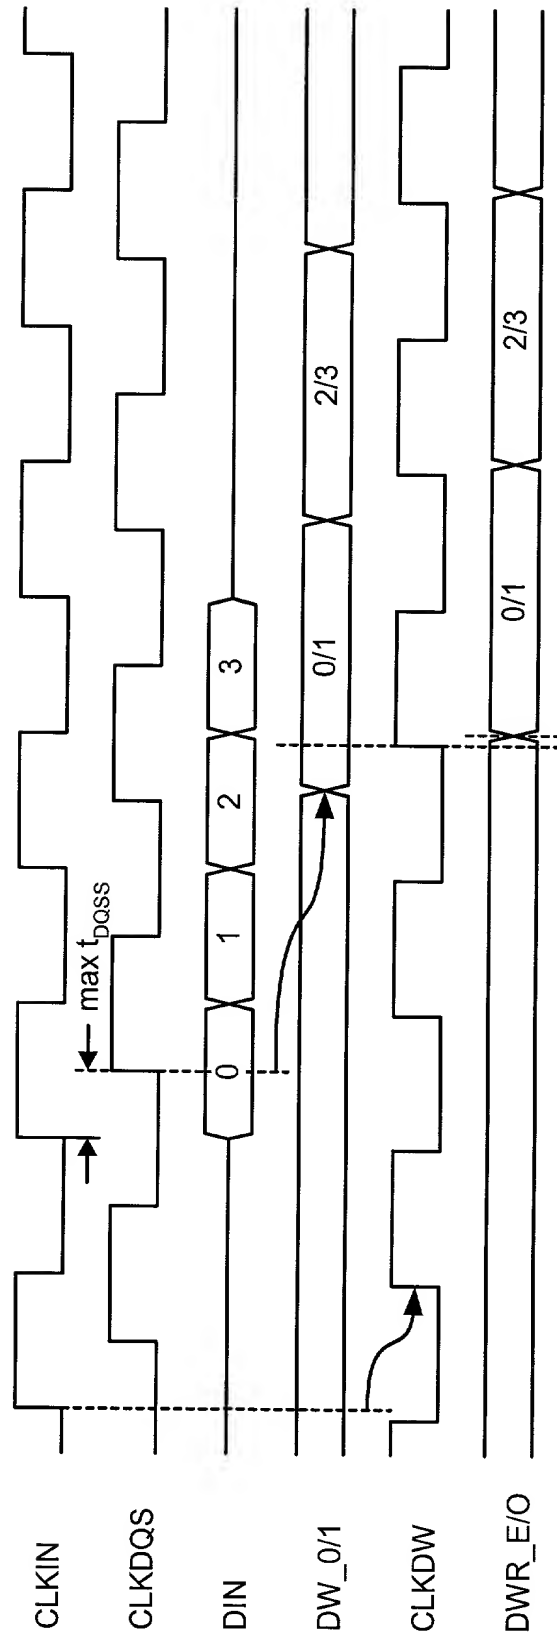


FIG. 6C

FIG. 7

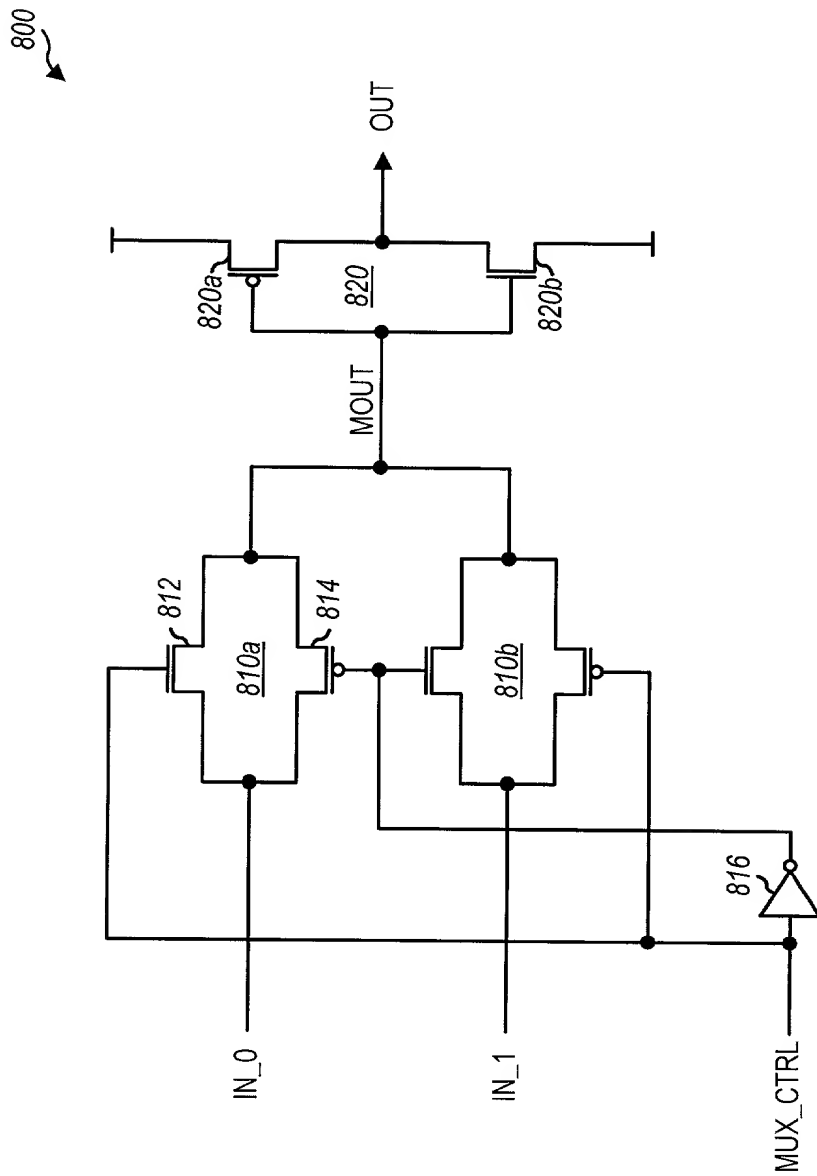


FIG. 8



FIG. 9

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I declare that:

My residence, post office address and citizenship are as stated below next to my name; I believe I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled: **DATA INPUT AND OUTPUT CIRCUITS FOR MULTI-DATA RATE OPERATION** the specification of which is attached hereto.

I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information that is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I claim no foreign priority benefits under Title 35, United States Code, Section 119.

I claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

Application No.	Date of Filing

I claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application No.	Date of Filing	Status

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Truong T. Dinh, Reg. No. 40,993

Please Send Correspondence to: Truong T. Dinh DINH & ASSOCIATES 2506 Ash Street Palo Alto, California 94306	Please Direct Telephone Calls to: Truong T. Dinh Reg. No. 40,993 Telephone: (650) 289-0600 Facsimile: (650) 289-0700
---	--

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full Name of Inventor 1	Last Name: Zheng	First Name: Hua	Middle Name or Initial:	
Residence & Citizenship:	City: Fremont	State/Foreign Country: Ca	Country of Citizenship: US	
Post Office Address:	Post Office Address: 256 Scotia Court	City: Fremont	State/Country: Ca	Postal Code: 94539
Signature & Date:	Signature of Inventor :			Date: